




PREMIERE™
CONCRETE
SOLUTIONS

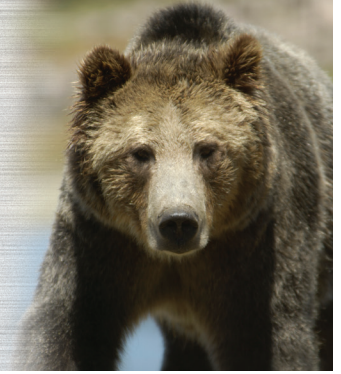

BEAR COAT D.O.T. CURE

PRODUCT DATA

DESCRIPTION

D.O.T Cure is a water based, white pigmented, wax emulsion concrete curing compound. When applied to fresh concrete, D.O.T Cure creates a film that retains water thus enabling the cement to fully hydrate achieving higher ultimate strength while reducing surface shrinkage cracks. The white pigmentation keeps the concrete cool to further ensure the concrete's best performance.

USES

- D.O.T Cure is used to cure any exterior concrete including pavement, curbing, sidewalks, driveways, parking lots, median barriers, and mat foundations.

ADVANTAGES

- Stable solution to allow for reduced length and frequency of agitation
- Excellent moisture retention - consistently meets ASTM C309
- White pigments reflect heat in hot weather and act as a gauge of proper application rate
- Superior spraying characteristics for economical application and reduced labor cost
- Available in pails, drums, or totes

Coverage

Coverage is dependent on surface texture and porosity.

Curing 200 ft.²/Gallon 5 M²/Liter

Packaging

D.O.T Cure is packaged in 5 gallon (18.9 liter) pails, shipped 36 per pallet, 55 gallon (208 liter) drums, 275 gallon (1040 liter) totes.

Technical Data

- ASTM C-309, Types II, Class A, Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete
- AASHTO M-148, Type II, Class A
- Complies with National Volatile Organic Compound Emission Standards for Architectural Coatings, Federal EPA Regulation 40 CFR Part 59

V.O.C. Content 30 gm/L

Water Loss < 0.15 kg/m² @ 24 hrs

< 0.40 kg/m² @ 72 hrs

Light Reflectance minimum 65%

Settling (150 ml Kimax cylinder) < 5 ml in 2 hours
< 25 mil in 24 hours

Solids 27 +/- 2 %

Flash Point NONE

Weight 8.42 lbs./gal. (1 Kg / L)



PREMIERE CONCRETE SOLUTIONS
P.O. Box 157 • 508 Cedar Street • Pioneer, Ohio 43554
Phone: 800-503-3418 • Fax: 419-737-9400
Email: support@premiereconcretesolutions.com
Website www.bearcoat.net

APPLICATION

MIXING: Do not dilute. Stir or agitate D.O.T Cure before using to disperse pigments and solids uniformly. If using a pump to recirculate D.O.T Cure, it is recommended that an air diaphragm pump be used. If using a centrifugal pump, mix only long enough to make the D.O.T Cure homogeneous. Do not over mix as this may cause foaming and may damage the curing compound.

APPLICATION: Use a low pressure, airless sprayer equipped with a fan tip or a short napped roller to apply. Hold sprayer tip 6-8 inches (15-20 cm) from the surface of concrete. Apply uniformly leaving no pinholes or gaps but avoid over applying or puddles.

CURING: Apply D.O.T Cure after all bleed water has dissipated and application will not mar surface.

DRYING TIME: D.O.T Cure dries in less than 4 hours at 70°F (21°C) at 50% relative humidity. Cooler temperatures or high relative humidity may slow drying process.

CLEAN-UP

Clean tools and equipment used in applying D.O.T Cure with warm water and detergent.

LIMITATIONS

- D.O.T Cure is not recommended for interior use or where appearance is important.
- Do not apply if surface or ambient temperature is below 40°F (4°C). Product should be conditioned to 50°F (10°C) prior to application.
- Do not use D.O.T Cure as a bond breaker for tilt-up construction.

STORAGE

Store in tightly closed containers in warm area, between 50°-100°F (10°-38°C). Do not allow to freeze. Shelf life of properly stored material is one year from date of manufacture.

CAUTIONS

May cause skin and eye irritation. Do not take internally. Keep out of reach of children.

All label precautions and the MSDS must be fully understood before using this product.

PREMIERE CONCRETE SOLUTIONS

P.O. Box 157

508 Cedar St.

Pioneer, Ohio 43554

Phone: 800-503-3418 Fax: 419-737-9400



This Product is formulated and labeled for Industrial and Commercial Use only. For best results and safest usage, user is specifically directed to consult the current material safety data sheet and package label for this product.

Premiere Concrete Solutions warrants its products to be free of manufacturing defects and that they will meet Premiere Concrete Solutions current published physical properties when applied in accordance with Premiere Concrete Solutions directions and tested in accordance with ASTM and Premiere Concrete Solutions standards. Premiere Concrete Solution makes no warranty or guarantee, express or implied, including warranties of fitness for a particular purpose or merchantability, respecting its products, and Premiere Concrete Solutions shall have no other liability with respect thereto. Any claim regarding product defect must be received in writing within one (1) year from the date of shipment. No claim will be considered without such written notice or after the specified time interval. Our liability shall be limited to replacement of, or refund of an amount not to exceed the purchase price attributed to, the goods as to which such claim is made. Our selection of one of these alternatives shall be Buyer's exclusive remedy. In no case shall we be liable for consequential or special damages. Even if we have been advised of the possibility of such damages. The foregoing warranties are in lieu of all other warranties, guarantees, co-conditions and representations, either expressed or implied, whether arising under any statute. Common Law, usage or trade, course of dealing or otherwise, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. User shall determine the suitability of the products for the intended use and assume all risks and liability in connection therewith.